

ASSEMBLY INSTRUCTION

# Roof Bar Light

Part no: 19778-03



# Included


- Lights with wiring



# Recommendation:

Start by checking where it is suitable to drill the hole for the cables in the roof of the vehicle. This can vary depending on the vehicle.

For neat cable management, centre the roof bar on the vehicle's roof and mark the roof bar accordingly with the hole in the roof.

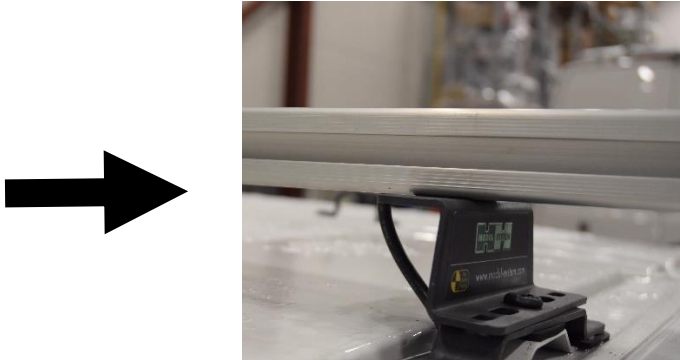


## Instruction:

Remove the black caps on both sides of the roof bar. Drill a hole at the smooth surface of the roof bar (the side facing down when mounted), for the loose end cable to go through later. Remove any sharp leftovers from drilling, so there's no risk of damaging the cable.




Separate the lights from the cable. It is important to remember which part of the cable that goes to the left light, and which goes to the right. Mark the connectors with L and R accordingly.

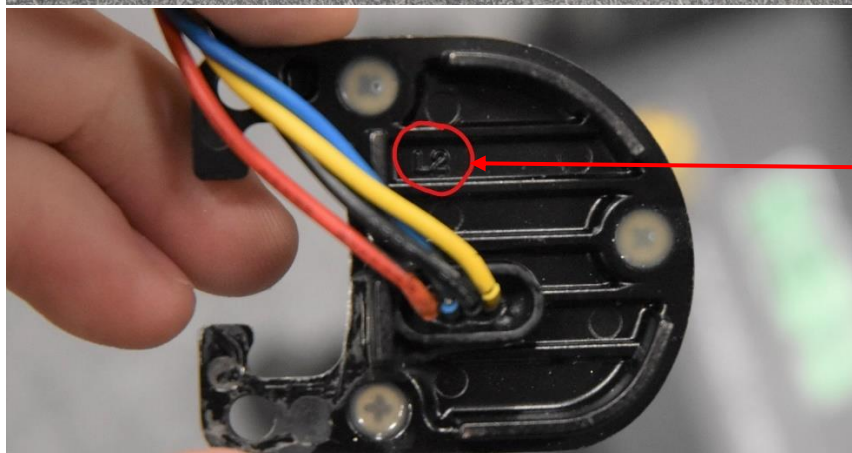

*The lights are  
marked with L  
or R*



Pull the loose end cable through the hole and rest of the cabling in the roof bar.

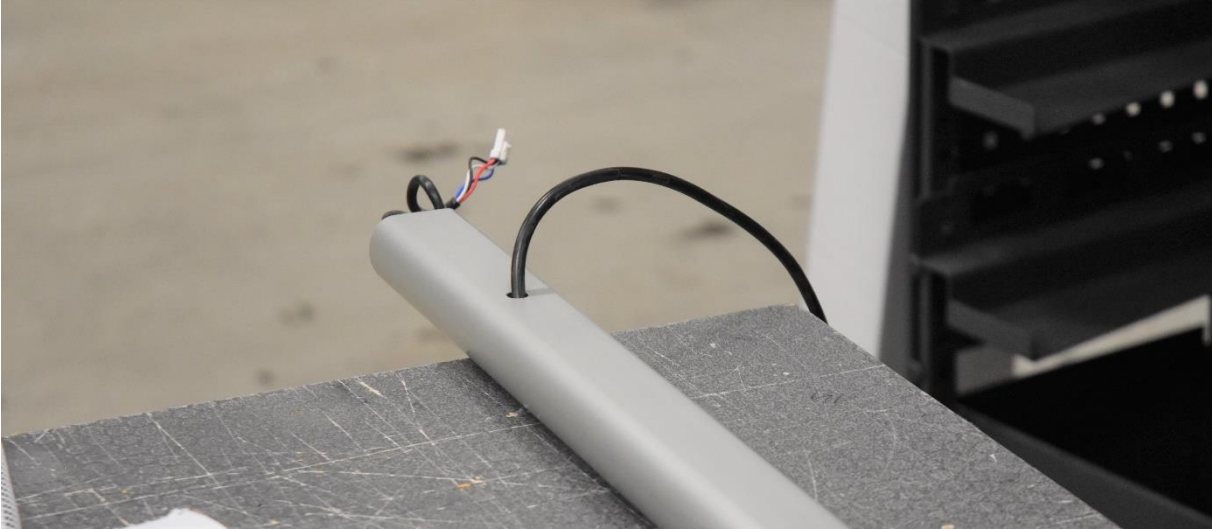

Connect the lights with the cable and screw them on the roof bar.

